



# **9700 & 8900 & 3700 EXIT DEVICES**

**PRODUCT CATALOG**

# Contents

- 1** 9700 Series Exit Devices
- 2** ED9700 / EF9700—Rim Exit Device
- 3** ED9727 / EF9727—Surface Vertical Rod Exit Device
- 4** ED9727LBR / EF9727LBR —Less Bottom Rod Exit Device
- 5** ED9747 / EF9747 —Concealed Vertical Rod Exit Device
- 6** ED9775 / EF9775 —Mortise Exit Device
- 7** ED9757 / EF9757 —3-point Exit Device
- 8** 3700 Series Narrow Stile Exit Devices
- 9** ED3700 / EF3700 —Narrow Stile Rim Exit Device
- 10** ED3727 / EF3727 —Narrow Stile Surface Vertical Rod Exit Device
- 11** ED3727LBR / EF3727LBR —Narrow Stile Less Bottom Rod Exit Device
- 12** ED3747/ EF3747 —Narrow Stile Concealed Vertical Rod Exit Device
- 13** ED3775 / EF3775 —Narrow Stile Mortise Exit Device
- 14** 8900 Series Exit Devices
- 15** ED8900 / EF8900 —Rim Exit Device
- 16** ED8927 / EF8927 —Surface Vertical Rod Exit Device
- 17** ED8927LBR / EF8927LBR —Less Bottom Rod Exit Device
- 18** ED8947/ EF8947 —Concealed Vertical Rod Exit Device
- 19** ED8975 / EF8975 —Mortise Exit Device
- 20** Motorized Exit Device Trim
- 21** How to order Kestros trim
- 22** Kestros trim functions
- 24** Electronic Locks - 2000 Series
- 25** Electronic Locks - 5000 Series BLE
- 26** Electronic Locks - 5000 Series Wi-Fi
- 27** TownSteel Maxx Access System
- 28** How to order trim
- 29** Trim Selection
- 35** Strikes
- 38** Accessories
- 40** Door Applications

# How to order

## Device order example

**EF 37 27 3684 630 CD3 LBR**

### Rating

ED Panic exit hardware  
EF Fire exit hardware

### Device model

37 3700 series Narrow stile  
89 8900 series  
97 9700 series

### Device type

00 Rim  
27 Surface vertical rod  
47 Concealed vertical rod  
57 3 point device (For 9700 series only)  
75 Mortise

### Device size

36 36" (914mm)  
48 48" (1219mm)  
consult factory for others

### Door height

blank For Rim and Mortise  
84 84" (2134mm) (for SVR, CVR, 3PT and LBR)  
96 96" (2438mm) (for SVR, CVR, 3PT and LBR)

### Finish

630 Satin stainless steel finish  
consult factory for others

### Options

Blank	For regular device		
DE	Delayed egress	E	Electric mortise lock
LX	Latch bolt monitoring	CD3	3700 Series cylinder kit
LRX	Latch bolt+RQE monitoring	CD8	8900 Series cylinder kit
RX	RQE monitoring	CD9	9700 Series cylinder kit
2RX	Double RQE monitoring	AK3	3700 Series alarm kit
ELR	Electric latch retraction	AK8	8900 Series alarm kit
SS	Signal switch	AK9	9700 Series alarm kit

### Less bottom rod option

Blank For regular device  
LBR Less bottom rod SVR device

### Strikes and Shim Kits


STK 600 (standard)	8900 Series Rim device
STK 900 (standard)	9700 & 3700 Series Rim/3PT device
STK 701 (optional)	8900 Series Rim device
O-STK 710 (optional)	8900, 3700, 9700 Series Rim device
T-STK 720 (standard)	SVR & 3PT
T-STK 720C (standard)	CVR
B-STK 730 (standard)	SVR & 3PT
B-STK 730C (standard)	CVR
B-STK 731 (optional)	SVR
B-STK 732 (optional)	SVR and CVR
B-STK 733 (optional)	SVR and CVR
SK 750-950 (standard)	Shim Kit for STK 600/900
SK-751 (optional)	Shim Kit for STK 701
SK-952 (standard)	Shim Kit for O-STK 710

### Accessories

FP-760	Filler plate
FP-761	Filler plate
ETR-1	Extension rod 1'(305 mm)
ETR-1C	Extension rod 1'( for CVR)(305 mm)
ETR-2	Extension rod 2'(610 mm)
ETR-2C	Extension rod 2'( for CVR)(610 mm)
SNB-1	Sex nuts & bolts 1 1/4"-2" door(32-50.8 mm)
SNB-2	Sex nuts & bolts 2"-2 1/4" door(50.8-57 mm)
GSK-6R	Glass shim kit (8900 Series Rim)
GSK-3R	Glass shim kit (9700 Series Rim)
GSK-6V	Glass shim kit (8900 Series SVR, LBR, 3PT)
GSK-3V	Glass shim kit (9700 Series SVR, LBR, 3PT)
FL01-SS	Auxiliary Fire Latch bolt (LBR)
DK	Dogging Key

# 9700 Series Exit Devices

## General Information

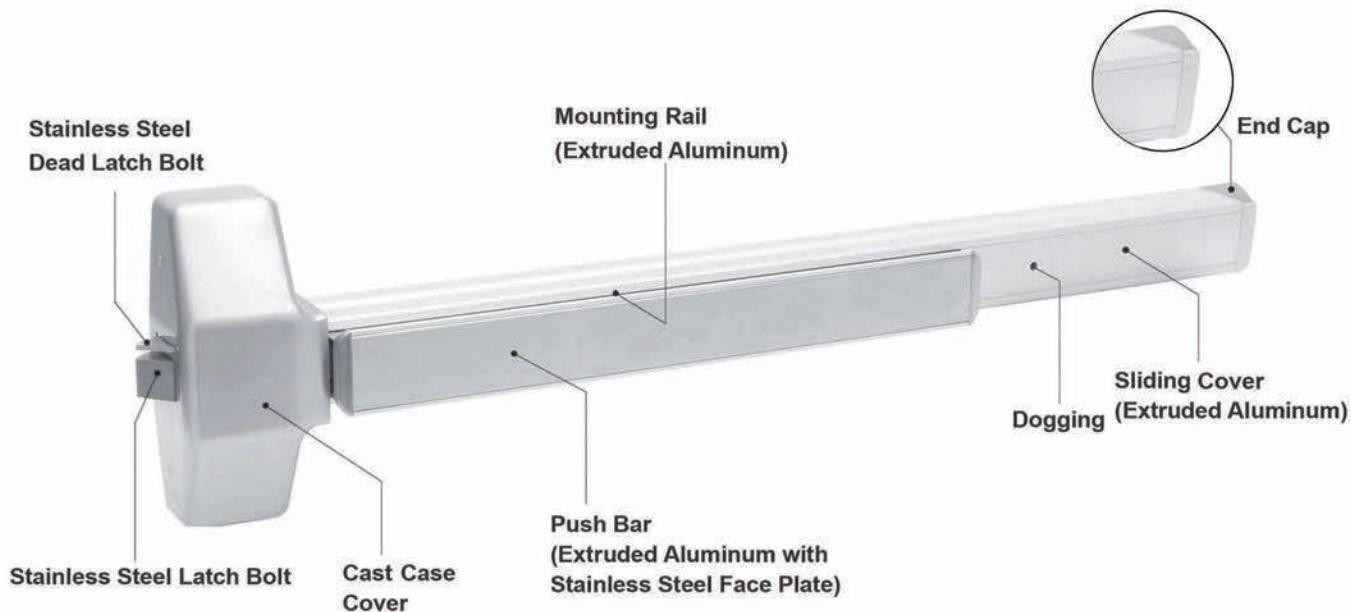


## Features

- All devices are non-handed or reversible design.
- UL Listed for Fire Exit hardware, 3 hours.
- High shock-resistant latching mechanical design for vandalism protection.
- "A" Label (3 hr) rating on pairs of doors up to 8' x 8' for same or double egress.
- All internal components are made of electro-plated corrosion-resistant alloy.

## Dimensions

### Standard for Door Width 36"

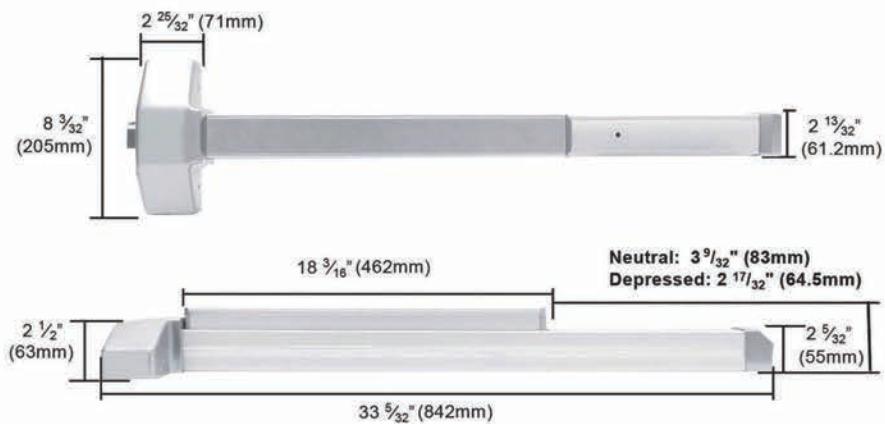

For Door Width	Device Size
28" (711 mm)	Please Consult Factory
48" (1219 mm)	48" (1219 mm) available



## Specifications

<b>Handing</b>	Non-handed
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	900 Rigid Strike standard
<b>Alarm</b>	Available with AK9
<b>Latch bolt</b>	Stainless Steel, 3/4" (19mm) throw
<b>Dead Latch bolt</b>	Stainless Steel
<b>Dogging Feature</b>	1/2 turn hex dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD9
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 9/32" (83mm) Push bar Depressed 2 17/32" (64.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL10C fire rated, 3 hours
<b>Shim Kit</b>	950 Shim kit standard

Top Strike  
720**Specifications**

<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	720 Top Strike standard
	730 Bottom Strike standard
<b>Alarm</b>	Available with AK9
<b>Latch bolt</b>	Stainless Steel Top latch 3/4" (19mm) throw Bottom latch 1/2" (12.7mm) throw

Dogging key  
(for non-fire rated devices)

<b>Dead Latch bolt</b>	None
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD9
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 9/32" (83mm) Push bar Depressed 2 17/32" (64.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>Fire Rated</b>	Certified UL 305 & UL10C fire rated, 3 hours
<b>Shim Kit</b>	None

Bottom Strike  
730

# ED9727LBR / EF9727LBR

## —Less Bottom Rod Exit Device

LBR

Top Strike  
720

### Specifications



<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	720 Top Strike standard
	No Bottom Strike
<b>Alarm</b>	Available with AK9
<b>Latch bolt</b>	Stainless Steel
	Top latch 3/4" (19mm) throw
<b>Dead Latch bolt</b>	None
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices



<b>Cylinder Dogging</b>	Available with CD9
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 9/32" (83mm) Push bar Depressed 2 17/32" (64.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL10C fire rated, 3 hours Fire latch only for fire-rated device
<b>Shim Kit</b>	None

**Top Strike**  
720C



## Specifications



**Bottom Strike**  
730C



**Bottom Strike**  
733

<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	720C Top Strike standard 730C Bottom Strike standard or 733 Bottom Strike
<b>Alarm</b>	Available with AK9
<b>Latch bolt</b>	Stainless Steel Top latch 3/4" (19mm) throw Bottom latch 1/2" (12.7mm) throw



Dogging key  
(for non-fire rated devices)

<b>Dead Latch bolt</b>	None
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD9
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 9/32" (83mm) Push bar Depressed 2 17/32" (64.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL10C fire rated, 3 hours
<b>Shim Kit</b>	None



## Specifications

<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	905 Mortise Strike standard
<b>Alarm</b>	Available with AK9
<b>Latch bolt</b>	Stainless Steel, 3/4" (19mm) throw
<b>Dead Latch bolt</b>	Stainless Steel
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD9
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 9/32" (83mm) Push bar Depressed 2 17/32" (64.5mm)
<b>Mounting Height</b>	39 3/16" (99.5cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL10C fire rated, 3 hours
<b>Shim Kit</b>	None

# ED9757 / EF9757

## —3-point Exit Device

3PT

Top Strike  
720

### Specifications



<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	900 Rigid Strike standard
	720 Top Strike standard
	730 Bottom Strike standard
<b>Alarm</b>	Available with AK9
<b>Latch bolt</b>	Stainless Steel, 3/4" (19mm) throw Top latch 3/4" (19mm) throw Bottom latch 1/2" (12.7mm) throw



Dogging key  
(for non-fire rated devices)



Shim Kit  
950

Strike  
900

**Dead Latch bolt**

None

**Dogging Feature**

1/2 turn hex key dogging standard

For non-fire rated devices

**Cylinder Dogging**

Available with CD9

**Door Size**

36" (914mm) standard, 48" (1219mm) available  
(Consult factory for others)

**Minimum Stile Width**

4 3/4" (120mm)

**Door Thickness**

1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)

**Projection**

Push bar Neutral 3 9/32" (83mm)

Push bar Depressed 2 17/32" (64.5mm)

**Mounting Height**

41" (104.1cm) from CL to finished floor

Bottom Strike  
730

**UL**

Certified UL 305 & UL10C fire rated, 3 hours

**Shim Kit**

950 Shim kit standard

# 3700 Series Exit Devices

## General Information




## Features

- All devices are non-handed or reversible design.
- UL Listed for Fire Exit hardware, 3 hours.
- High shock-resistant latching mechanical design for vandalism protection.
- "A" Label (3 hr) rating on pairs of doors up to 8' x 8' for same or double egress.
- All internal components are made of electro-plated steel or corrosion-resistant alloy.

## Dimensions

### Standard for Door Width 36"

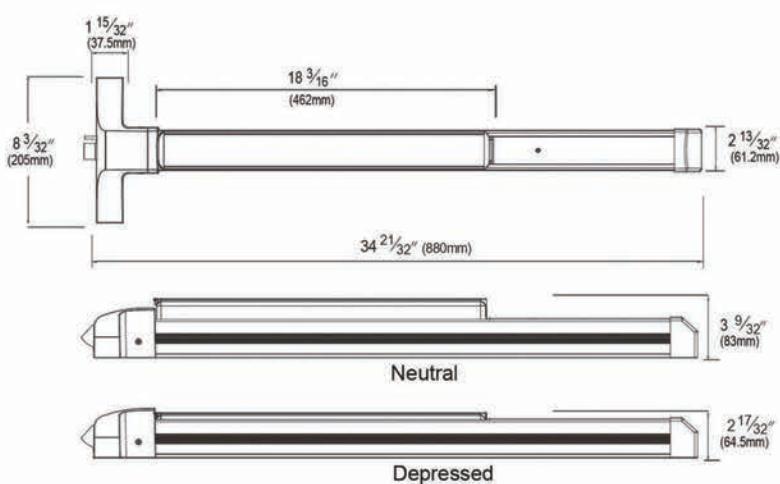

For Door Width	Device Size
28" (711 mm)	Please Consult Factory
48" (1219 mm)	48" (1219 mm) available



Shim kit 950      Strike 900

Dogging key  
(for non-fire rated devices)

## Specifications

<b>Handing</b>	Non-handed
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	900 Strike standard
<b>Alarm</b>	Available with AK3
<b>Latch bolt</b>	Stainless Steel, 3/4" (19mm) throw
<b>Dead Latch bolt</b>	Stainless Steel
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD3
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	1 3/4" (45mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 9/32" (83mm) Push bar Depressed 2 17/32" (64.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL fire rated, 3 hours
<b>Shim Kit</b>	950 shim kit standard

## —Narrow Stile Surface Vertical Rod Exit Device

**Top Strike**  
720



## Specifications

<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	720 Top Strike standard
	730 Bottom Strike standard
<b>Alarm</b>	Available with AK3
<b>Latch bolt</b>	Stainless Steel Top latch 3/4" (19mm) throw Bottom latch 1/2" (12.7mm) throw



Dogging key  
(for non-fire rated devices)

<b>Dead Latch bolt</b>	None
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD3
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	1 3/4" (45mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 9/32" (83mm) Push bar Depressed 2 17/32" (64.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & 10C fire rated, 3 hours
<b>Bottom Strike</b> 730	<b>Shim Kit</b> None

**Bottom Strike**  
730

**Top Strike**  
720



## Specifications

**Handing**

Field Reversible

**Finishes**

630 standard (Consult factory for others)

**Strikes**

720 Top Strike standard

No Bottom Strike

**Alarm**

Available with AK3


**Latch bolt**

Stainless Steel

Top latch 3/4" (19mm) throw

**Dead Latch bolt**

None

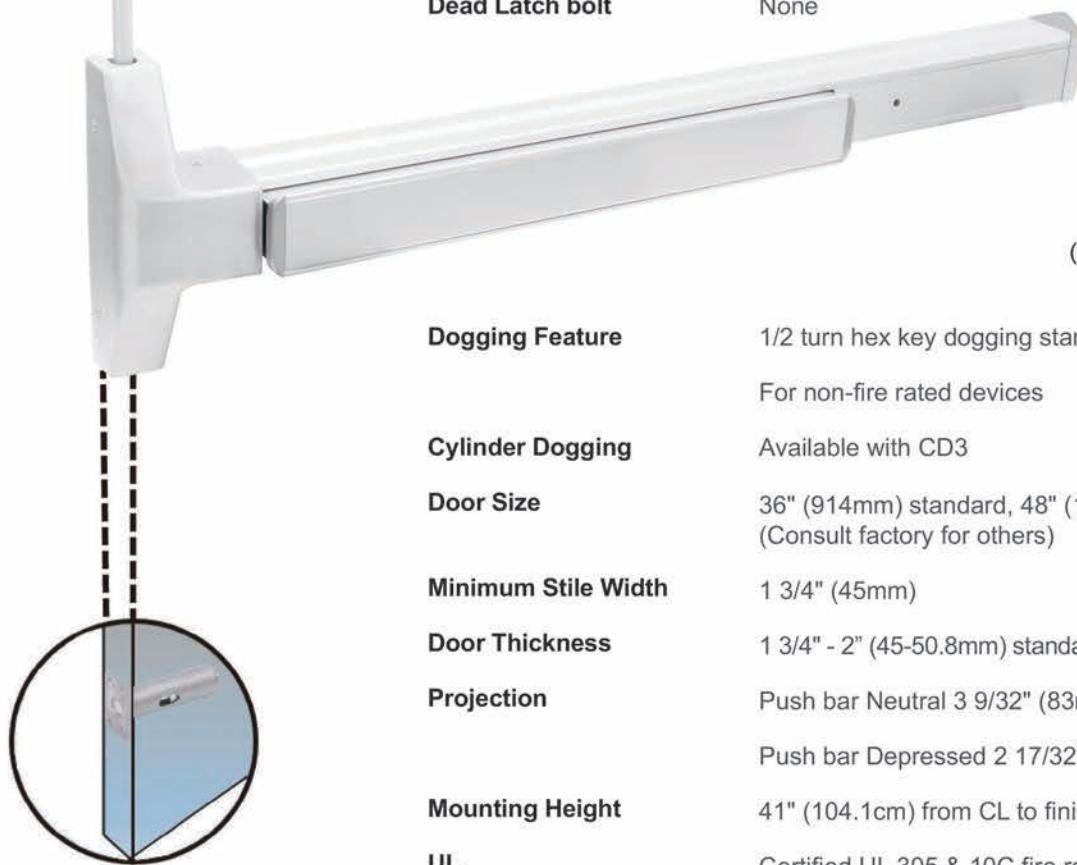

**Auxiliary Fire  
Latch Assembly**



Dogging key  
(for non-fire rated devices)

**Dogging Feature**

1/2 turn hex key dogging standard

For non-fire rated devices

**Cylinder Dogging**

Available with CD3

**Door Size**

36" (914mm) standard, 48" (1219 mm) available  
(Consult factory for others)

**Minimum Stile Width**

1 3/4" (45mm)

**Door Thickness**

1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)

**Projection**

Push bar Neutral 3 9/32" (83mm)

Push bar Depressed 2 17/32" (64.5mm)

**Mounting Height**

41" (104.1cm) from CL to finished floor

**UL**

Certified UL 305 & 10C fire rated, 3 hours

Fire latch only for fire-rated device

**Shim Kit**

None

**—Narrow Stile Concealed Vertical Rod Exit Device****Top Strike  
720C****Specifications**

<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	720C Top Strike standard
	730C Bottom Strike standard or 733 Bottom Strike
<b>Alarm</b>	Available with AK3
<b>Latch bolt</b>	Stainless Steel
	Top latch 3/4" (19mm) throw
	Bottom latch 1/2" (12.7mm) throw

**Dogging key  
(for non-fire rated devices)**

<b>Dead Latch bolt</b>	None
<b>Dogging Feature</b>	1/2 turn hex key dogging standard
	For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD3
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	1 3/4" (45mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 9/32" (83mm)
	Push bar Depressed 2 17/32" (64.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & 10C fire rated, 3 hours
<b>Shim Kit</b>	None

**Bottom Strike  
730C****Bottom Strike  
733**




## Specifications

<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard (Consult factory for others)
<b>Strikes</b>	905 Mortise Strike standard
<b>Alarm</b>	Available with AK3
<b>Latch bolt</b>	Stainless Steel, 3/4" (19mm) throw
<b>Dead Latch bolt</b>	Stainless Steel
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD3
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 9/32" (83mm) Push bar Depressed 2 17/32" (64.5mm)
<b>Mounting Height</b>	39 3/16" (99.5cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL10C fire rated, 3 hours
<b>Shim Kit</b>	None

# 8900 Series Exit Devices

## General Information

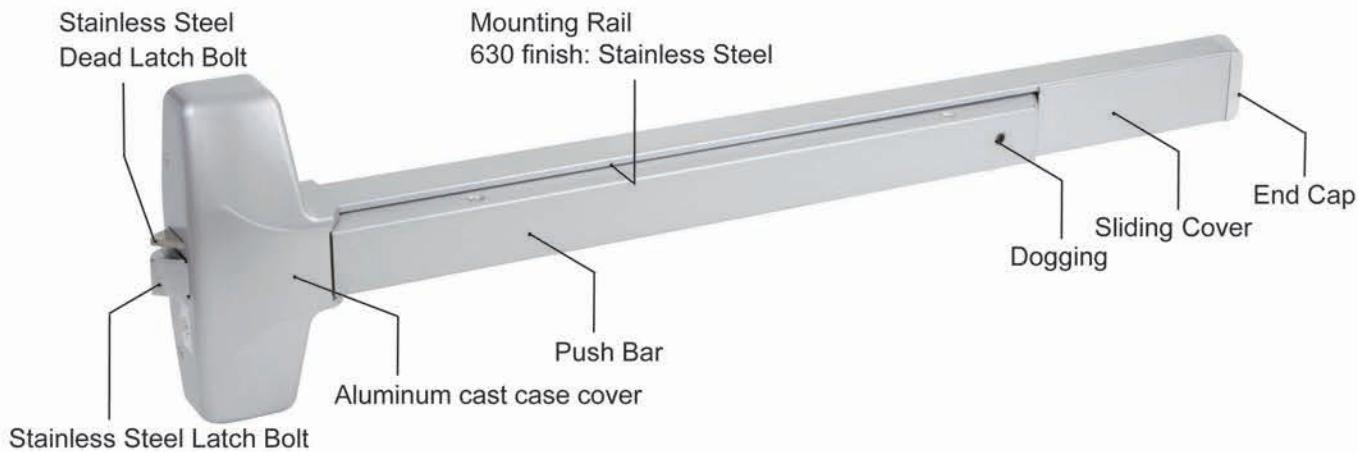


## Features

- All devices are non-handed or reversible design.
- UL Listed for Fire Exit hardware, 3 hours.
- Variety of rose and escutcheon levers.
- Trims feature a through-bolt design that allow for a secure and durable installation.
- High shock-resistant latching mechanical design for protection.
- "A" Label (3 hr) rating on pairs of doors up to 8' x 8' for same or double egress.
- All internal components are made of electro-plated steel and corrosion-resistant alloy.

## Dimensions

### Standard for Door Width 36"

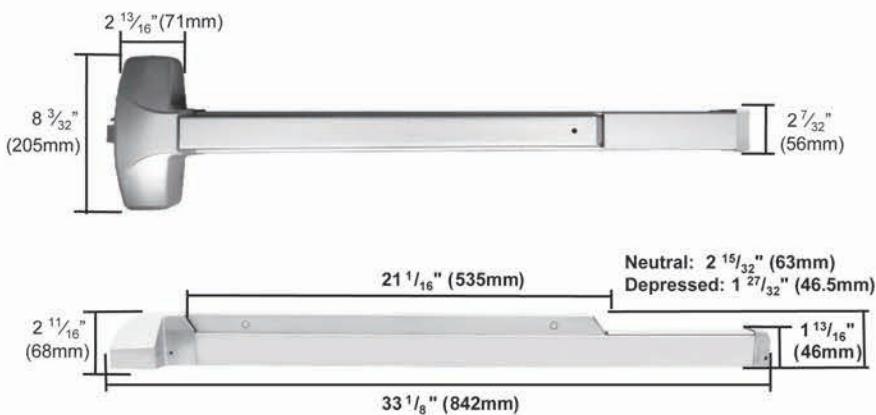

For Door Width	Device Size
24" (610 mm)	Please Consult Factory
48" (1219 mm)	48" (1219 mm) available



## Specifications

<b>Handing</b>	Non-handed
<b>Finishes</b>	630 standard, AL, Duro (Consult factory for others)
<b>Strikes</b>	600 Rigid Strike standard
<b>Alarm</b>	Available with AK8
<b>Latch bolt</b>	Stainless Steel, 3/4" (19mm) throw
<b>Dead Latch bolt</b>	Stainless Steel
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD8
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 2 15/32" (63mm) Push bar Depressed 1 27/32" (46.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL 10C fire rated, 3 hours
<b>Shim Kit</b>	750 shim kit standard

## —Surface Vertical Rod Exit Device

Top Strike  
720

## Specifications

Bottom Strike  
730


<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard, AL, Duro (Consult factory for others)
<b>Strikes</b>	720 Top Strike standard 730 Bottom Strike standard
<b>Alarm</b>	Available with AK8
<b>Latch bolt</b>	Stainless Steel Top latch 3/4" (19mm) throw Bottom latch 1/2" (12.7mm) throw
<b>Dead Latch bolt</b>	None

Dogging key  
(for non-fire rated devices)

<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD8
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard. (Consult factory for others)
<b>Projection</b>	Push bar Neutral 3 15/32" (63mm) Push bar Depressed 1 27/32" (46.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL10C fire rated, 3 hours
<b>Shim Kit</b>	None

Top Strike  
720**Specifications**

<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard, AL, Duro (Consult factory for others)
<b>Strikes</b>	720 Top Strike standard
	No bottom strike
<b>Alarm</b>	Available with AK8
<b>Latch bolt</b>	Top latch 3/4" (19mm) throw
<b>Dead Latch bolt</b>	None
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD8

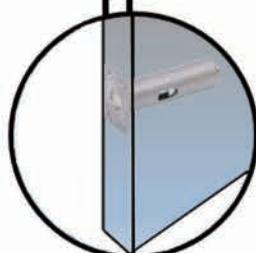**Auxiliary Fire Latch Assembly**

<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 2 15/32" (63mm) Push bar Depressed 1 27/32" (46.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL10C fire rated, 3 hours Fire latch only for fire-rated device (option)
<b>Shim Kit</b>	None

Dogging key  
(for non-fire rated devices)

## —Concealed Vertical Rod Exit Device

Top Strike  
720CBottom Strike  
730CBottom Strike  
733

## Specifications

<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard, AL, Duro (Consult factory for others)
<b>Strikes</b>	720C Top Strike standard
	730C Bottom Strike standard or 733 Bottom Strike
<b>Alarm</b>	Available with AK8
<b>Latch bolt</b>	<p>Stainless Steel</p> <p>Top latch 3/4" (19mm) throw</p> <p>Bottom latch 1/2" (12.7mm) throw</p>
<b>Dead Latch bolt</b>	None

Dogging key  
(for non-fire rated devices)

<b>Dogging Feature</b>	1/2 turn hex key dogging standard
	For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD8
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	<p>Push bar Neutral 2 15/32" (63mm)</p> <p>Push bar Depressed 1 27/32" (46.5mm)</p>
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL10C fire rated, 3 hours
<b>Shim Kit</b>	None

# ED8975 / EF8975

## —Mortise Exit Device

MTP



### Specifications

<b>Handing</b>	Field Reversible
<b>Finishes</b>	630 standard, AL, Duro (Consult factory for others)
<b>Strikes</b>	905 Mortise Strike standard
<b>Alarm</b>	Available with AK8
<b>Latch bolt</b>	Stainless Steel, 3/4" (19mm) throw
<b>Dead Latch bolt</b>	Stainless Steel
<b>Dogging Feature</b>	1/2 turn hex key dogging standard For non-fire rated devices
<b>Cylinder Dogging</b>	Available with CD8
<b>Door Size</b>	36" (914mm) standard, 48" (1219mm) available (Consult factory for others)
<b>Minimum Stile Width</b>	4 3/4" (120mm)
<b>Door Thickness</b>	1 3/4" - 2" (45-50.8mm) standard (Consult factory for others)
<b>Projection</b>	Push bar Neutral 2 15/32" (63mm) Push bar Depressed 1 27/32" (46.5mm)
<b>Mounting Height</b>	41" (104.1cm) from CL to finished floor
<b>UL</b>	Certified UL 305 & UL10C fire rated 3 hours
<b>Shim Kit</b>	None

# Motorized Exit Device Trim

US PATENT: #10604963

## Motorized Exit Device Trim


- Push bar with electronic control  
(Electronic trim only. Exit push bar sold separately)
- UL 10C 3 Hour Rated
- Gap between lever return and door surface less than 1/2" (12.7mm)  
(dependent upon lever selection)
- Backset: 2-3/4" (70mm)
- Door thickness: 1-3/4" - 2" (45-50.8mm), other upon request

## Cylinder Specifications


- Schlage® C keyway, brass 6 pin cylinder standard
- SFIC less core, for 6 or 7 pin
- Schlage® LFIC less core, Corbin® LFIC less core available
- High security SFIC core available, TownSteel "L" keyway, 7 pin
- KD, KA, MK, GGMK, and construction keying available



Quest lever shown

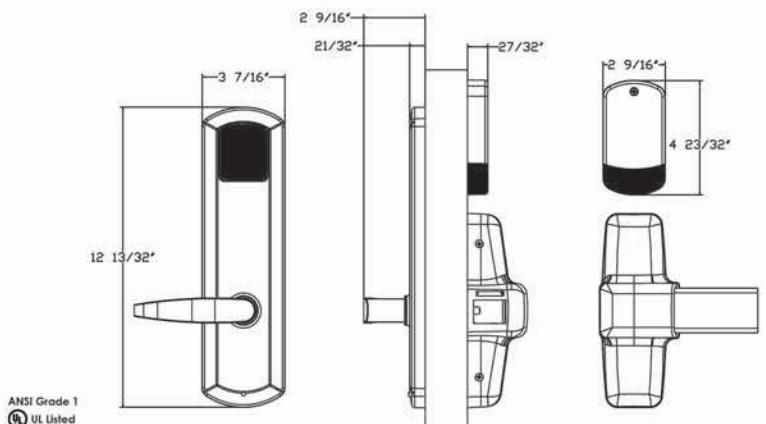

Sentinel lever shown

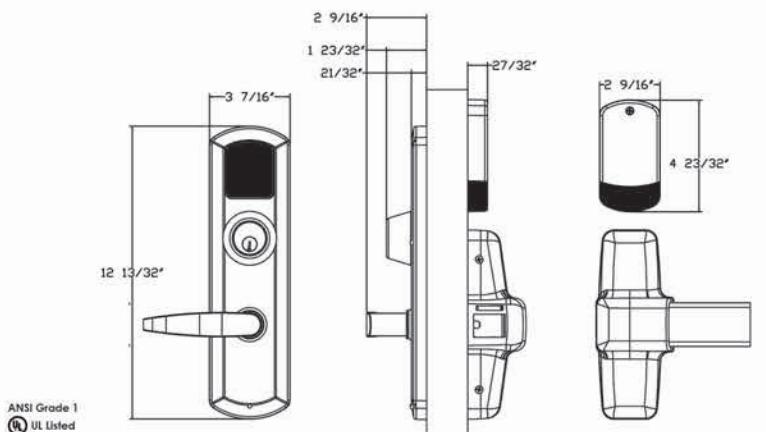

**KES** **914e** **R** **1** **S** **LHR** **626** **SC**

### **Escutcheon**

EKE1A	Electronic trim
EKE1B	Electronic trim with cylinder
KES	Electrified or mechanical trim

### **KES Functions**

Blank	For EKE
902	Dummy
903	Night Latch (Storeroom)
908	Entrance
909e	Electrified trim with cylinder (10-30 VDC)
914	Passage
914e	Electrified trim (10-30 VDC)

### **EKE Functions**

Blank	For KES
2	2000 series, metal keypad
5R	5000 series, touch keypad, RFID & Wi-Fi
5B	5000 series, touch keypad, RFID & BLE
6	6000 series, RFID technology

### **Exit device type**

R	Rim devices
S	Surface vertical rod, 3PT & LBR devices
M	Mortise exit devices
C	Concealed vertical rod devices

### **Electrified rating (Electrified trim only)**

Blank	Electronic or mechanical trim
1	FAIL SAFE
2	FAIL SECURE

### **Lever**

S	Sentinel
Q	Quest
Consult factory for others	

### **Handing**

LHR	Left Hand Reverse
RHR	Right Hand Reverse





### **Finish**

626	Satin Chrome finish (standard)
consult factory for others	





### **Cylinder**

Blank	Trim without cylinder
SC	Schlage® C keyway, brass 6 pin cylinder (standard)
SFIC	Small Format IC, less core
SLFIC	Schlage® LFIC less core
L7	High security 7 pin cylinder with TownSteel "L" keyway
CLFIC	Corbin® LFIC less core

## Escutcheon Lever Trim

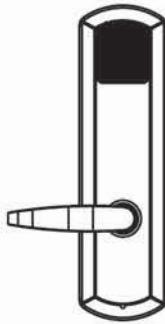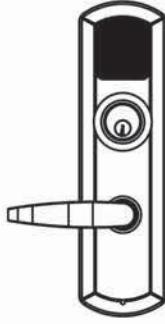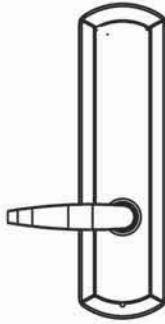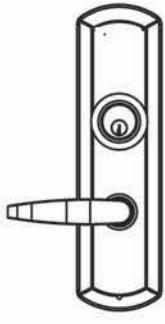Illustration	Series	Function	Function Description
	EKE1A	F13 ENTRANCE BY COMBINATION	Electronic Trim Battery powered with 4 AA batteries
	EKE1B	F13 ENTRANCE BY KEY OR COMBINATION	Electronic Trim Cylinder override and battery powered with 4 AA batteries
	KES 902	DUMMY	Non-functioning set without locking mechanism
	KES 903	F03 NIGHT LATCH, KEY RETRACTS LATCH	Entrance by trim when latch is retracted by key. Key removable only when locked.

## Escutcheon Lever Trim

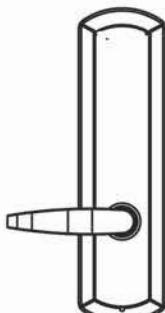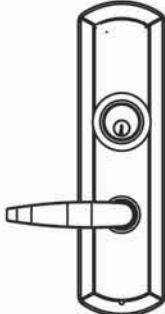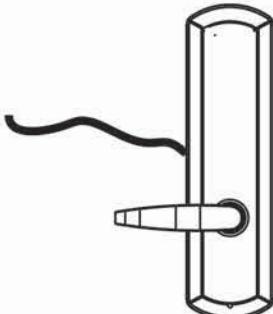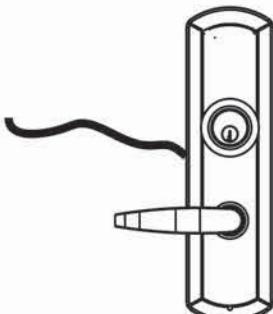Illustration	Series	Function	Function Description
	KES-914	F14 PASSAGE LEVER OR KNOB ALWAYS ACTIVE	Latch bolt operated by lever at all times.
	KES-908	F-08 ENTRANCE, KEY LOCKS OR UNLOCKS LATCH	Entrance by lever, key locks or unlocks lever
	KES-914e	F-914e 1 - FAIL SAFE 2 - FAIL SECURE	Electrified trim FAIL SAFE or FAIL SECURE No cylinder Operable at 10-30 VDC
	KES-909e	F-909e 1 - FAIL SAFE 2 - FAIL SECURE	Electrified trim FAIL SAFE or FAIL SECURE With key override Operable at 10-30 VDC

# Electronic Locks

## 2000 Series

2000 Series is a standalone electronic function lock that provides keypad technology integrated with an ANSI Grade 1 heavy duty lockset for greater security. Keypad technology simplifies the management of the system and provides ease of use. Maximum code capacity includes 1 master code, 100 user codes, and 5 service codes. The 2000 Series is quick and easy to program.


## Electronic Specifications

<b>Application</b>	Full indoor and outdoor
<b>User codes</b>	Up to 100
<b>Communication</b>	Multi-colored LED and Sound
<b>Power supply</b>	4AA Alkaline batteries
<b>Battery life</b>	Up to 2 years
<b>Operating Temperature</b>	-31 ° F to 151 ° F (-35°C to 66°C)
<b>Certifications</b>	FCC Part 15

## Programming Features

- 12-key push button illuminated
- Code length: 4-6 digits
- 100 pin codes capacity



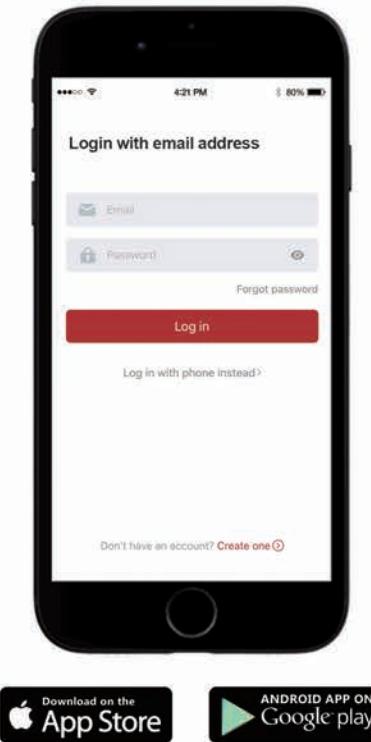

## General Information

The TSE Home mobile application simplifies the ability to connect users to their locks and provides the power to manage access. The user can use their compatible bluetooth mobile device to conveniently and securely access assigned rooms. View activity logs of your property and be aware when batteries need to be changed.

With the TSE Home mobile app, it's easy to configure settings, manage users, add and delete credentials, and view activity log. Updates to configuration and access privileges can be sent to the device using the TSE Home mobile app.

## General Information

Electronic credentials simplify managing keys and eliminate the need to re-key locks by allowing the owner to provide a unique credential to authorized users that can be deleted and replaced if lost.

Smart credentials (13.56 MHz)

- MIFARE® S50 EV1 1k
- MIFARE® S70 EV1 4k
- PIN Codes (6-10 digits)
- Up to 400 codes or keycards

## Features

### TSE Home mobile app

- Add new locks or devices
- Configure lock and device settings\*
- Add new user codes\*
- Assign users to each credential
- Manage users and assign privileges
- View and export audits\*
- Receive notifications and updates\*
- Manage device firmware updates\*
- Configure lock and device settings\*
- Unlock the door wirelessly\*

\* Completed within 20 feet of the lock

## Technology recommendations

### Apple iOS

- Apple iOS 13 & higher
- iPhone 8 or newer


### Android

- Android 10.0 & higher
- A device from a major manufacturer is recommended
  - Google Nexus 6 or newer, Pixel or newer
  - HTC One m9
  - Samsung S6 or newer

# Series 5000 Wi-Fi

## Mobile application & Wi-Fi Series Locks

Wi-Fi

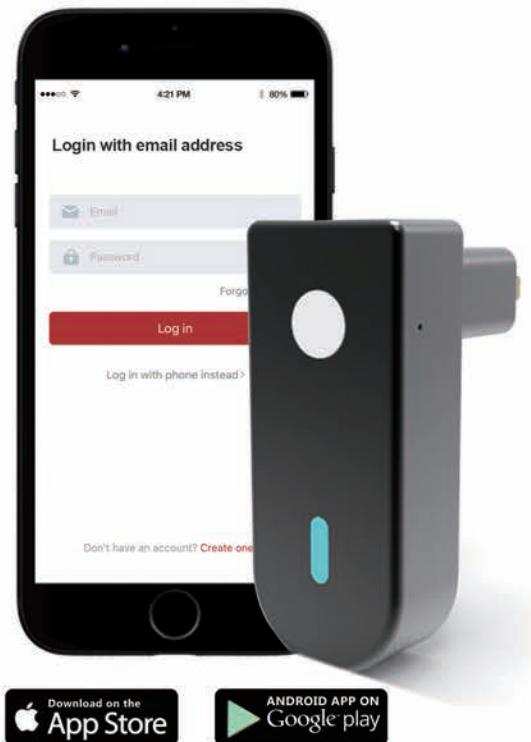

### General Information

The TSE Home mobile application simplifies the ability to connect users to their locks and provides the power to manage access. Grant a temporary guest key, view the activity log and stay aware when batteries need to be changed.

In order to operate the locks you will require a Gateway. The Gateway sends and receives data stream from your Phone/APP (Remotely) via the Internet Router in your property and converts it into RF signals to communicate with the Series 5000 Wi-Fi Lock.

With the TSE Home mobile app, it's easy to configure settings, manage users, assign access privileges, add and delete credentials, and view activity log and alerts. Updates to configuration and access privileges can be sent to the lock remotely.

### General Information

Electronic credentials simplify managing keys and eliminate the need to re-key locks by allowing the owner to provide a unique credential to authorized users that can be deleted and replaced if lost.

Smart credentials (13.56 MHz)

- MIFARE® S50 EV1 1k
- MIFARE® S70 EV1 4k
- PIN Codes (6-10 digits)
- Up to 400 codes or keycards

### System features

#### TSE Home mobile app

- Add new locks or devices
- Configure lock and device settings
- Add new users and credentials\*
- Assign users to each credential\*
- Manage users and assign access privileges\*
- View and export audits
- Receive notifications and updates\*
- Manage device firmware updates\*
- Configure lock and device settings\*
- Unlock the door wirelessly\*

\* Completed remotely using Wi-Fi Gateway

### Technology recommendations

#### Apple iOS

- Apple iOS 13 & higher
- iPhone 8 or newer

#### Android

- Android 10.0 & higher
- A device from a major manufacturer is recommended
  - Google Nexus 6 or newer, Pixel or newer
  - HTC One m9

# TownSteel Maxx Access System

## Overview

Maxx Access System management software provides a comprehensive cost-effective and access control solution for properties. Whether you are managing apartments, privatized student housing or senior living facilities, TownSteel now offers a centralized interface to manage all aspects of property access control from individual living spaces to property perimeter and elevator control.

This offline Windows®-based system designed by TownSteel for enhanced user experience and security, offers centralized administration and control of sites scalable to your needs. Some of the system's top features impacting multi-housing and hotels can tailor access privileges to staff or guests quickly and easily using the intuitive, user-friendly software. Single-door architecture makes specifying, installing, and maintaining the system secure yet straightforward. Advanced features include integrated access control and elevator control. Plus, you can quickly generate multi-activity reports in a few clicks. It is compatible with all TownSteel 6000 series locks such as the e-Kestros, e-Kontos, e-Genius, e-Elite, e-Trident and e-Cronus.

- Create user profiles to secure system access.
- Facilitates replacement of lost cards.
- Common and restricted area management through credential or scheduled access.
- View, save or print reports
- Supports multi-room access with one key.
- Securely programs and encodes credentials and accessories.



### Trim order example

ED8900T 08 R 630 SC

#### Trim Selection

ED8900LS	Sectional CTS lever trim
ED8900LQ	Sectional SDQ lever trim
ED8900P1	Pull trim
ED8900P2	Pull trim
ED8900P3	Pull trim
ED8900T	Thumbpiece trim
ED8900NE	Narrow stile lever trim escutcheon
ED8900NP	Narrow stile pull trim

#### Function

08	Entrance
09	Storeroom
14	Passage
02	Dummy
01	Cover (Pull trim only)

#### Exit device type

R	Regular (Rim, SVR, LBR & 3 point)
M	Mortise exit device
C	Concealed vertical rod exit device





#### Finish

630	Satin Stainless Steel finish (standard)
ALUM	Aluminum finish (standard for pull trim)
consult factory for others	

#### Cylinder

SC	6 pin Schlage® C keyway
SFIC	Small format IC (SFIC) Less core
SLFIC	Schlage® large format IC less core
CLFIC	Corbin® large format IC less core

## Sectional Lever Trim

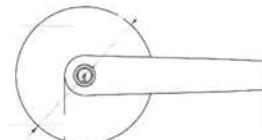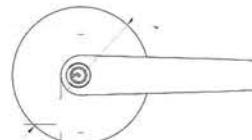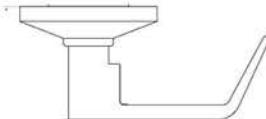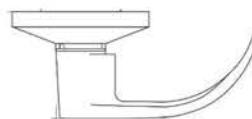

ED8900LQ Lever shown

ED8900LS Lever shown

### Features:

- Non-handed
- Compatible with 8900 Series Exit Device
- Thru-bolted mounting
- Available for panic and fire rated rim and vertical rod exit devices
- Lever length: 5-1/4" (133mm)
- Door thickness: 1-3/4" (45mm)
- Cylinder: Schlage® C keyway standard, 6 pin
- SFIC & SLFIC: Less core
- Available finish: US32D




### Function

Trim Type	ANSI Code	Function
ED8900L-02	F-02 Dummy	Pull when dogged
ED8900L-08	F-08 Entrance	Key locks or unlocks latch bolt
ED8900L-09	F-09 Storeroom	Night latch, key retracts latch bolt
ED8900L-14	F-14 Passage	Lever operable

### How To Order

Trim Type	ED8900LS ED8900LQ	<b>Example:</b> ED8900LS - 08 - R - 626 - SC 1. ED8900LS _____ 2. Entrance _____ 3. Rim _____ 4. US26D _____ 5. Schlage® C keyway _____
Function	02, 08, 09, 14	
Exit Device Type	R: Rim, SVR, LBR & 3PT	
Finish	626 (consult factory for others)	
Cylinder	SC, SFIC, SLFIC	

## Pull Trim

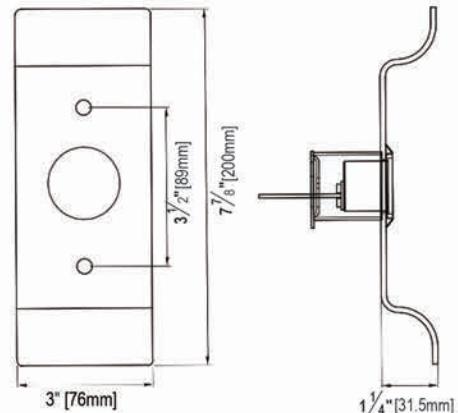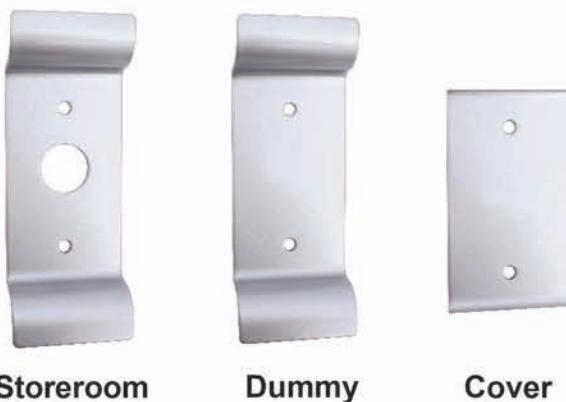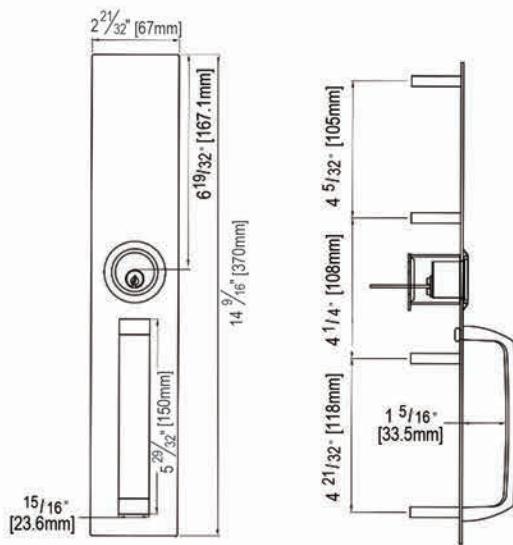**ED8900P1**

**ED8900P2**


## Function

Trim Type	ANSI Code	Function
ED8900P1-01 ED8900P2-01	F-01 Cover	Exit only
ED8900P1-02 ED8900P2-02	F-02 Dummy	Pull when dogged
ED8900P1-09 ED8900P2-09	F-09 Storeroom	Night latch, key retracts latch bolt

## How To Order

Trim Type	ED8900P1 ED8900P2
Function	01, 02, 09
Exit Device Type	R: Rim, SVR, LBR, 3PT
Finish	ALUM
Cylinder	SC, SFIC, SLFIC, CLFIC

**Example:**
ED8900P1 - 09 - R - ALUM - SC



1. ED8900P1
2. Storeroom
3. Rim
4. ALUM
5. Schlage® C keyway

## Pull Trim



Storeroom

Dummy

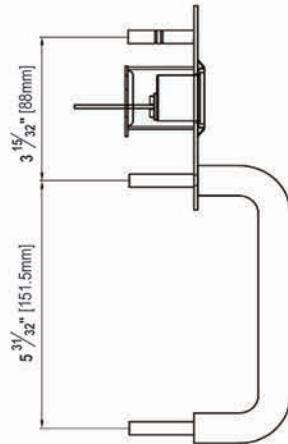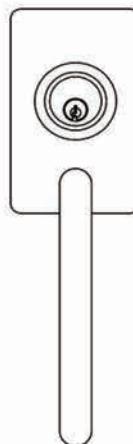


## Function

Trim Type	ANSI Code	Function
ED8900P3-02	F-02 Dummy	Pull when dogged
ED8900P3-09	F-09 Storeroom	Night latch, key retracts latch bolt

## How To Order

Trim Type	ED8900P3	<b>Example:</b> <u>ED8900P3 - 09 - R - ALUM - SC</u> 1. ED8900P3 ——— 2. Storeroom ——— 3. Rim ——— 4. ALUM ——— 5. Schlage® C keyway ———
Function	02, 09	
Exit Device Type	R: Rim, SVR, LBR, 3PT	
Finish	ALUM	
Cylinder	SC, SFIC, SLFIC, CLFIC	

## Thumbpiece Trim

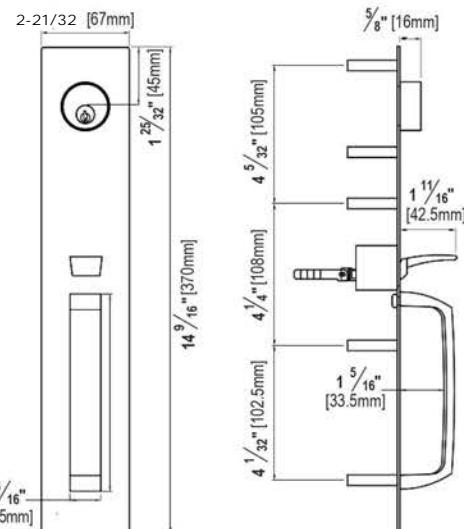



## Function

Trim Type	ANSI Code	Function
ED8900T-02	F-02 Dummy	Pull when dogged
ED8900T-08	F-08 Entrance	Key locks or unlocks latch bolt
ED8900T-09	F-09 Storeroom	Night latch, key retracts latch bolt
ED8900T-14	F-14 Passage	Lever operable

## How To Order

Trim Type	ED8900T	<b>Example:</b> 
Function	02, 08, 09, 14	
Exit Device Type	R: Rim, SVR, LBR, 3PT	
Finish	630	
Cylinder	SC, SFIC, SLFIC, CLFIC	

## Narrow Style Trim

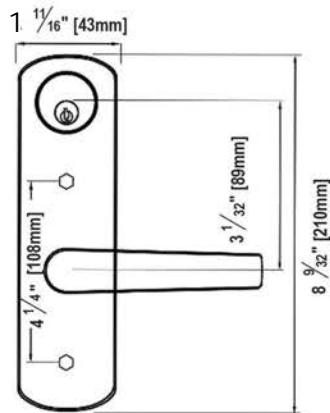

## Function



Trim Type	ANSI Code	Function
ED8900NE-02	F-02 Dummy	Pull when dogged
ED8900NE-08	F-08 Entrance	Key locks or unlocks latch bolt
ED8900NE-09	F-09 Storeroom	Night latch, key retracts latch bolt
ED8900NE-14	F-14 Passage	Lever operable

## How To Order

Trim Type	ED8900NE	<b>Example:</b> 
Function	02, 08, 09, 14	
Exit Device Type	R: Rim, SVR, LBR, 3PT M: Mortise C: CVR	
Finish	630	
Cylinder	SC, SFIC, SLFIC, CLFIC	


**Storeroom**


**Dummy**

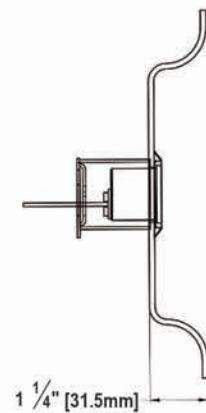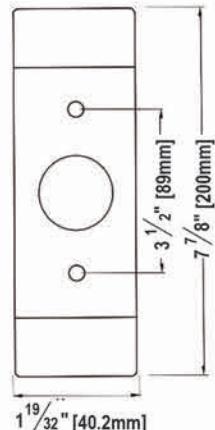**Cover**

**AL Color Standard**


## Function

Trim Type	ANSI Code	Function
ED8900NP-01	F-01 Cover	Exit only
ED8900NP-02	F-02 Dummy	Pull when dogged
ED8900NP-09	F-09 Storeroom	Night latch, key retracts latch bolt

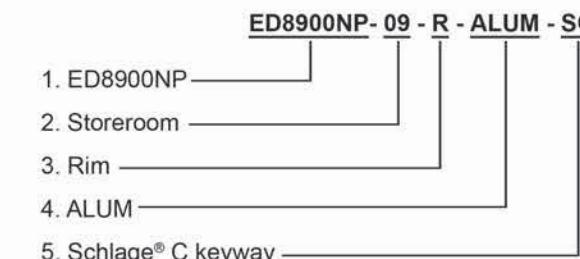
## How To Order

Trim Type	ED8900NP	<b>Example:</b>  <p>ED8900NP- 09 - R - ALUM - SC</p> <ol style="list-style-type: none"> <li>1. ED8900NP</li> <li>2. Storeroom</li> <li>3. Rim</li> <li>4. ALUM</li> <li>5. Schlage® C keyway</li> </ol>
Function	01, 02, 09	
Exit Device Type	R: Rim, SVR, LBR, 3PT	
Finish	ALUM	
Cylinder	SC, SFIC, SLFIC, CLFIC	


## Rim Device

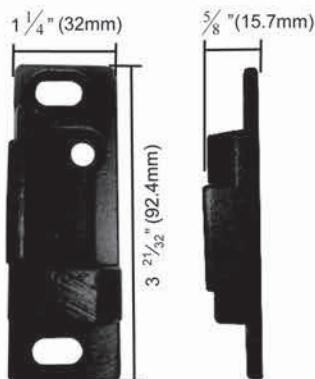


**STK 600**  
 (Standard for 8900 series)

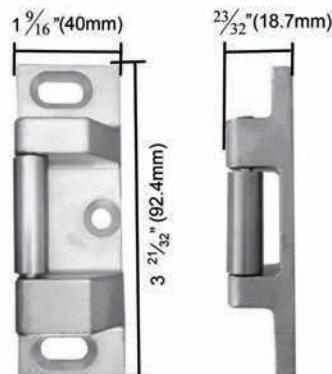

**STK 701**  
 (Optional for 8900 series)

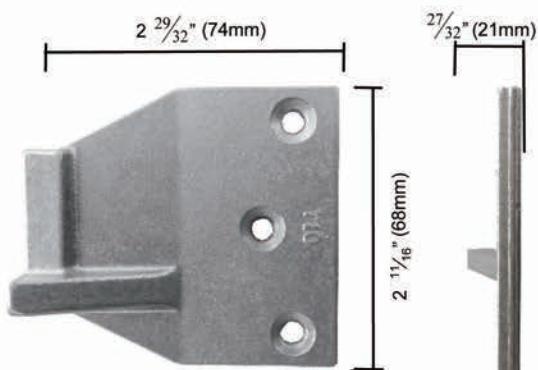

**O-STK 710**  
 (Optional for 3700, 8900, 9700 series)

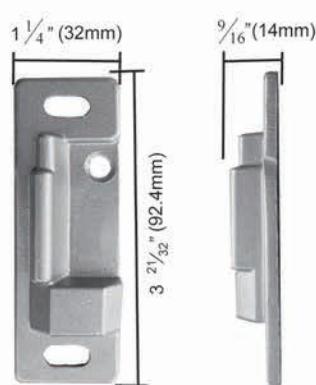

**STK 900**  
 (Standard for 3700, 9700 series)

## Shim Kit



**750-950**  
 For 600 and 900 Rim Strike




**751**  
 For 701 Rim Strike




**952**  
 For 710 Rim Strike

## Vertical Rod Device

### Top Strike

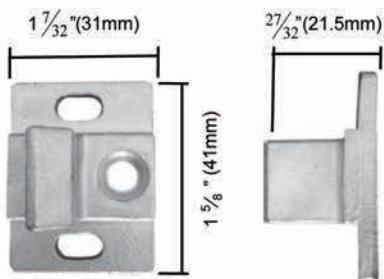


**T-STK 720**  
 (Standard for SVR, LBR & 3PT)

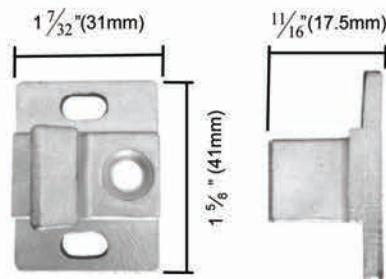


**T-STK 720C**  
 (Standard for CVR)


### Bottom Strike

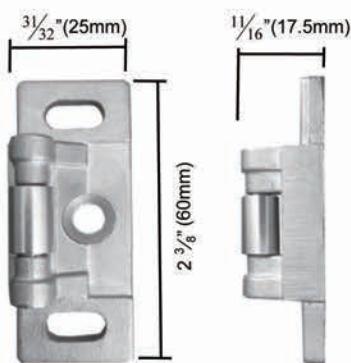


**B-STK 730**  
 (Standard for SVR & 3PT)

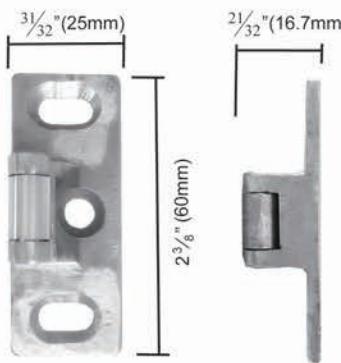


**B-STK 730C**  
 (Standard for CVR)

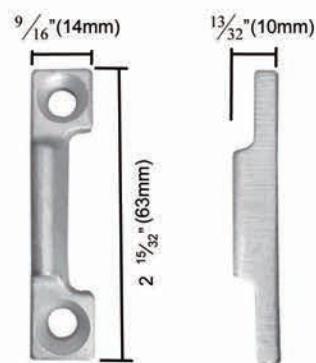

**B-STK 731**  
 (Optional for SVR & 3PT)

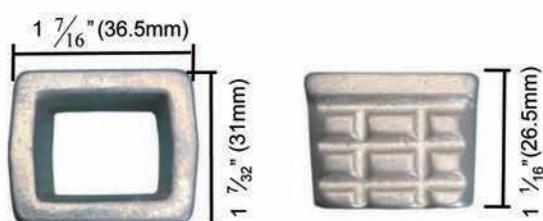


**B-STK 732**  
 Mortise in type  
 (Optional)

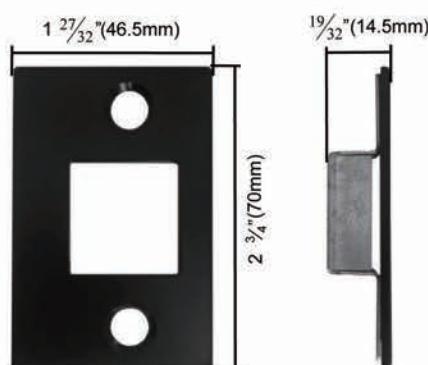


**B-STK 733**  
 Mortise in type  
 (Standard for CVR, Optional for others)

## Mortise Device

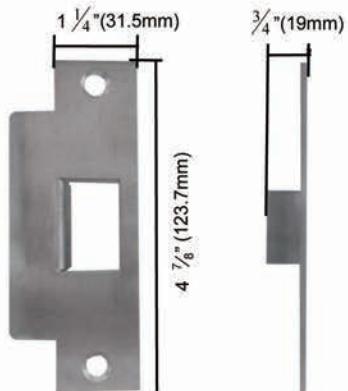


**STK 905**  
 (Standard for Mortise devices)

## Mortise Lock

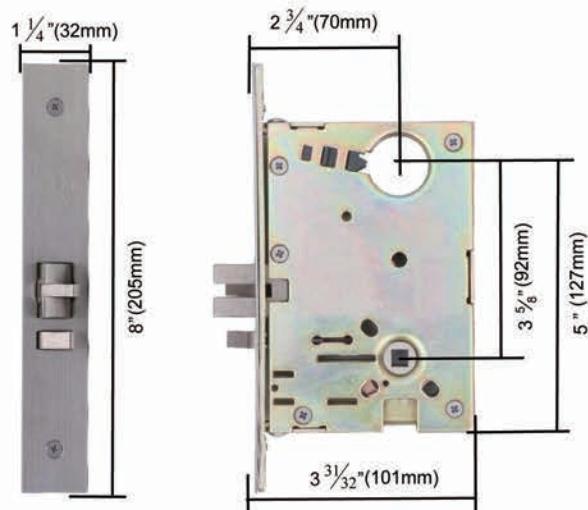

## Filler Plate

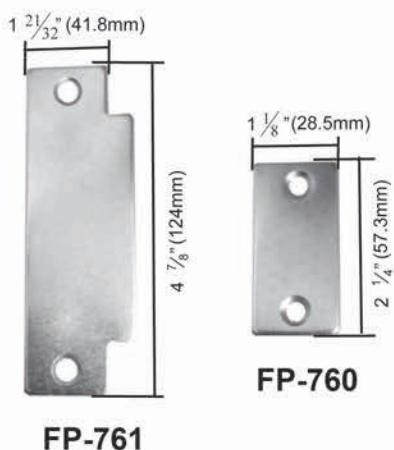


## Extension Rod

**ETR-1**  
 Length:1' (305 mm)



**ETR-1C**  
 Length:1' (305 mm)  
 (for CVR)

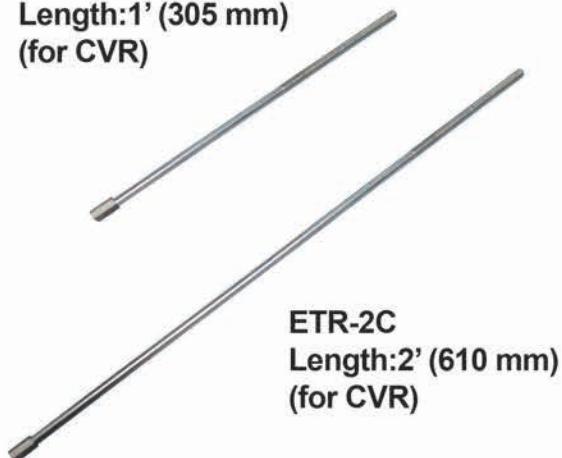

## Sex Nuts and Bolts(SNB)



**SNB-1**  
 1 1/4"-2" (32-50.8 mm)  
 door thickness



**SNB-2**  
 2" -2 1/4" (50.8-57 mm)  
 door thickness

## Cylinder Dogging Kit



CD8 8900 series  
 CD9 9700 series  
 CD3 3700 series

## Alarm Kit



AK8 8900 series  
 AK9 9700 series  
 AK3 3700 series

## Glass Shim Kit



Thickness: 1/8" (3mm)  
**GSK-6R**  
 (8900 series Rim devices only)



Thickness: 1/8" (3mm)  
**GSK-3R**  
 (9700 series Rim devices only)



Thickness: 1/8" (3mm)  
**GSK-6V**  
 (8900 series SVR, LBR & 3PT devices)




Thickness: 1/8" (3mm)  
**GSK-3V**  
 (9700 series SVR, LBR & 3PT devices)

## Dogging Key




DK

## Handing

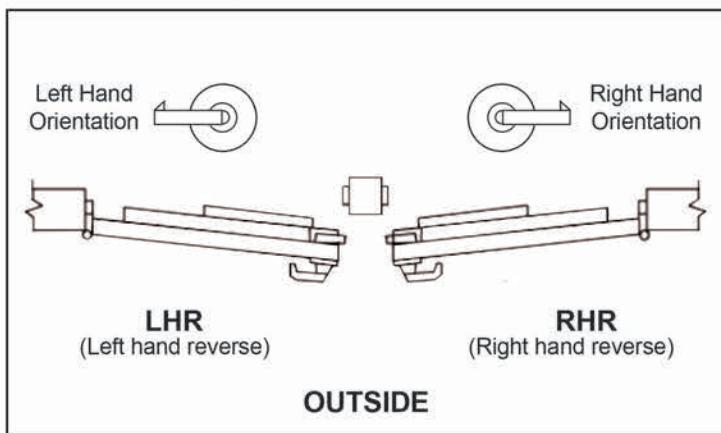


## Single Door

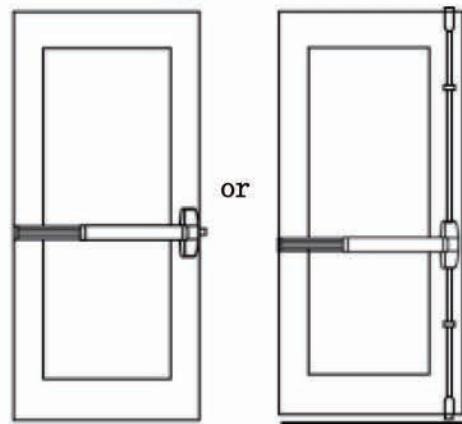


Rim type, Mortise type or vertical rod type

## Pair of Doors With Mullion

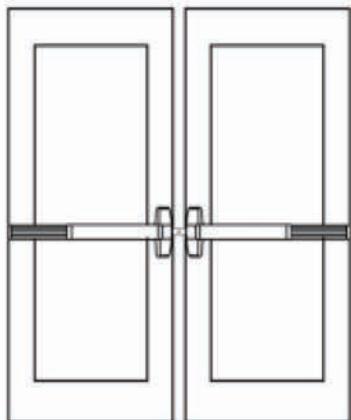


2 Rim type with mullion

## Pair of Doors Without Mullion

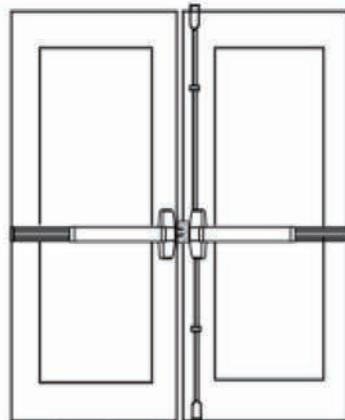


1 Rim type and 1 vertical rod type

## Pair of Doors Without Mullion

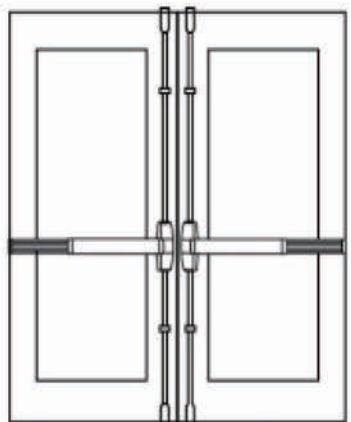

2 Vertical rod type

## Pair of Doors Without Mullion

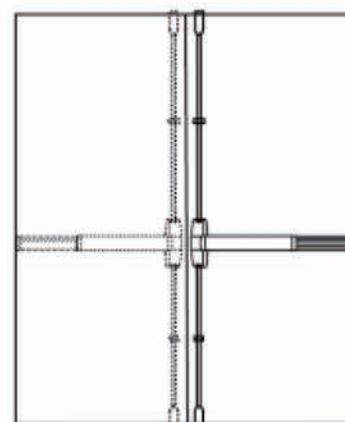

2 Vertical rod type

## **Townsteel Inc.**

17901 Railroad Street, City of Industry, CA 91748 | [sales@townsteel.com](mailto:sales@townsteel.com)

Toll Free: 1-877-858-0888 | Tel. (626) 965-8917 | Fax: (626) 965-8919

[www.townsteel.com](http://www.townsteel.com)   [www.townsteelectronics.com](http://www.townsteelectronics.com)