




GRADE 1 HEAVY DUTY CYLINDRICAL LOCK



CE-R Cylindrical Lock

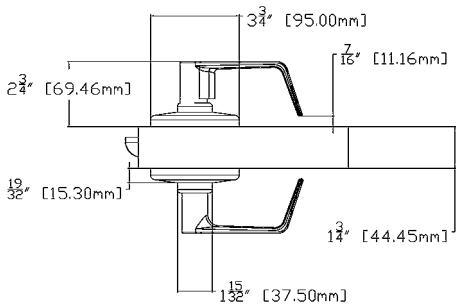

CE-R Dimensions

Features & Benefits

- ANSI/BHMA A156.2 Grade 1 Certified, UL 10(C) 3-hour fire rated, and ADA compliant.
- Internal spring design reduces lever sag and extends product life cycle, ensuring long-term durability with minimal maintenance.
- Quick installation with standard 161 door prep and adjustable through-bolts, saving time and labor.
- Low-projection rose for a clean, modern look.
- Heavy-gauge mounting plates and roses for added strength.
- Optional clutched lever for high-abuse environments.

Specifications

- Backsets: 2-3/4", 2-3/8", or 5"; Door Thickness: 1-3/4"
- Door Prep: 2-1/8" Bore hole with adjustable through-bolt posts for 2-5/8" or 2-3/4" CTC
- Handing: Non-handed
- Lockbody Options: CE (rigid) or CEC (clutched)
- Cylinder Options: 6-pin KIK Schlage® "C"; 6-pin KIK Kwikset® "KW"; 6- or 7-pin Best® "A" IC core; high-security TownSteel "L" keyways; Corbin® LFIC; Schlage® LFIC; SFIC (less core options available)
- Faceplate: 1-1/8" x 2-1/4", square corners
- Strike: ASA 1-1/4" x 4-7/8" (standard) or T-strike 1-1/8" x 2-3/4" (optional)
- Latch Bolt: 1/2" throw, stainless steel
- Rose: 19/32" projection, 3-3/4" diameter
- Collar / Inside Bearing: 7/16" projection, 1- 15/32" diameter

CE-R How-to-Order

Series	CE-R: Rigid Trim CEC-R: Clutched Trim
Funtion	75: Passage / 76: Privacy / 82: Entry/Office / 84: Classroom / 86: Storeroom / 87: Asylum / 89: Exit Latch / 109: Entry/Office / 110: Classroom Intruder
Lever	S: Sentinel / Q: Quest / G: Gala / E: Essen / ER: Essen Return / W: Wolfsburg
Finish	626: Satin Chrome / 622: Flat Black (<i>*Consult factory for other finishes</i>)
Cylinder	Blank: 6-pin KIK with Schlage® "C" keyway, standard / K6: 6-pin KIK with Kwikset® "KW" keyway / SF6: 6-pin IC core with Best® "A" Keyway / SF7: 7-pin IC core with Best "A" Keyway / HS6: High security 6-pin KIK with TownSteel "L" keyway / HS7: High security 7-pin IC core with TownSteel "L" keyway / CLF: Corbin® large format IC, less core / SLF: Schlage® large format IC, less core / SF: Small format IC, less core
Backset	[Leave Blank]: 2-3/4" / R: 2-3/8" / E: 5"
Strike	[Leave Blank]: ASA Strike / T: T Strike

CE - R - 109 - S - 626 - SF - R - T

